

Power Metering & Switching

Power Switching

NETIO

Networked power sockets



PRODUCTS OVERVIEW 2021

www.netio-products.com

NETIO

Networked power sockets

WHO IS NETIO?

The NETIO products company is a Czech producer of PDUs (Power Distribution Units) that can be controlled over LAN and WiFi. Our motto is: "NETIO products: Smart power sockets controlled over LAN and WiFi".

We are headquartered in Prague and our products are designed and manufactured in Europe. Product quality and ease of use are our primary recipes for customer satisfaction and solving customers' needs.

WHO ARE OUR PRODUCTS FOR?

Our power sockets are dedicated mainly for businesses (B2B). A typical user is a system integrator that uses our products in various industrial projects. Our products can be found in demonstration booths, shops, showrooms, digital signage screens, hospitals, and many other M2M and IoT applications.

We provide many power socket variants and different form factors for different application areas (PDUs for datacenter racks, DIN versions for smart building and electromobility applications, cables for compact solutions).

WHAT MAKES NETIO UNIQUE?



Remote WEB control

Control and configuration via web interface, where you can easily switch ON, OFF or REBOOT. Simple functions, such as Scheduler, IP Watchdog, Power-Up state and more...



Industrial quality

Quality is the number one priority: Long-life products with Zero Current Switching, well documented API standards, firmware updates, backwards compatibility and support - that is NETIO.



Easy integration using Open API

Control your NETIO power socket via any interoperable device, software or cloud. NETIO products support many Open API standards such as MQTT, Modbus/TCP, JSON over HTTP, SNMP, ...

NETIO Cloud (secured service)

NETIO Cloud is a perfect solution for remote restarting - one screen to control multiple devices from anywhere! Have you tried turning it OFF and ON again remotely?



Precise power metering

NETIO power socket models with metering support measure: Current [A], Output Power [W], Energy [Wh], True Power Factor, Voltage [V] and more... Great data source for your power analysis!



AV Drivers ready

To make integration even simpler, our partners develop amazing drivers for home automation and AV controllers - Control 4, ELAN, Crestron, RTI, Neets, Brightsign and many more...





LAN

Ethernet 10/100 Mbit interface (RJ-45) for wired connection to LAN (Local Area Network).



WEB INTERFACE

NETIO devices include their own web server. Each output can be controlled (switch on / off / restart) and configured over the web interface.



SERIAL PORT (RS-232)

Some NETIO devices include a (3-pin) RS-232 serial port. The serial port (serial console) can be connected to a specified TCP/IP port.




19" RACK

Some NETIO devices fit into 19" cabinet (1U). Metal brackets (Rack Mount Kits) are available as an accessory.



NETIO CLOUD

NETIO Cloud is a service for controlling multiple NETIO devices from one screen. It is well-secured and reliable. It is accessible via any web browser.



ZCS (ZERO CURRENT SWITCHING)

The relay contacts switch the output on or off when the current crosses the zero level. This reduces the negative effect of Inrush Current.



POWERUP STATE

This parameter defines the output state (On/Off/Last) after powering up the device or when power is restored after a power outage.



LUA SCRIPTING LANGUAGE

Some devices can run a custom Lua script for more complex switching conditions. The user enters the script in the device's web administration interface.



NFC PRE-CONFIG

Some devices can be easily configured (e.g. WiFi connection parameters set) using a mobile phone and the NETIO Mobile2 app.



SNMP v1/v2

SNMP v1/v2 (Simple Network Management Protocol) is a UDP-based protocol for monitoring and management of networks and services.



MQTT-flex

The MQTT-flex version of the MQTT protocol can be configured in detail thanks to the "flex" extension.



JSON over HTTP

JavaScript Object Notation (JSON) is a platform-independent data transfer format. A JSON data structure is transferred over HTTP(s).



Telnet

Telnet is a TCP/IP-based protocol used in computer networks that allows the user to connect to a remote computer using a Telnet application (console).



HTTP(s) Push XML

NETIO devices can periodically connect to the specified server over http / https and send data in a .xml (EXtensible Markup Language) structure.



WIFI

2,4 GHz wireless interface for connection to LAN (Local Area Network). Supports standard security options.



DI (DIGITAL INPUT)

Digital Input is an interface, which allows to detect binary signals (0 or 1). A digital input (DI) can be used to control the outputs or count S0 pulses.



POWER METERING

Some NETIO devices can measure electrical values – [A], [W], [Wh], TPF (True Power Factor), [V], [Hz], [°], ...




MOBILE APPLICATION

NETIO Mobile2 is a mobile application, which allows you to control multiple NETIO smart PDUs, strips, sockets and cables from a single screen.



INDUSTRIAL PRODUCT

Long-life products with wide operating temperature range, well documented devices and APIs, firmware updates, backwards compatibility,...



ZVS (ZERO VOLTAGE SWITCHING)

The relay contacts switch the output on or off when the voltage crosses the zero level. This reduces the negative effect of Inrush Current.



SCHEDULER

The Scheduler function (also known as Planner or Calendar) allows to specify a time plan for switching individual electrical sockets on and off.



IP WATCHDOG (PING)

Function, that checks the availability of another device in the network using the "ping" command (ICMP protocol).



MODBUS/TCP

Modbus/TCP is a communication protocol designed for industrial applications - exchanging data messages in a master-slave mode.



SNMP v3

SNMP version 3 supports secure communication. Unlike SNMP v1 and v2, it uses username and password authentication and SSL encryption.



MQTT

MQTT (Message Queuing Telemetry Transport) is a simple protocol for exchanging messages among devices. It is frequently used in IoT applications.



XML over HTTP

XML stands for eXtensible Markup Language. It is a language that uses tags in a defined structure. A XML data structure is transferred over HTTP(s).



URL API (http get)

Simple method for passing parameters as a part of a URL address (http get). In this way, it is easy to turn on/off or toggle each individual socket.



HTTP(s) Push JSON

NETIO devices can periodically connect to the specified server over http / https and send data in a .json (JavaScript Object Notation) structure.

PRODUCT FAMILIES

PowerBOX family



PowerPDU family



PowerDIN family




PowerCable family



PowerPDU 4C

PowerPDU 4C is a metered PDU with four IEC-320 C13 power outlets, 2 LAN ports (embedded Ethernet switch) and a serial port (RS-232). PowerPDU 4C measures electrical parameters (A, kWh, TPF, W, V, Hz) on each power outlet individually. Each output is controllable via its web interface over the local network or, when used with the NETIO Cloud service, integrators can easily access it remotely. Integrations are simple thanks to its Open API and ready AV drivers (Crestron, Extron, Savant, RTI, Neets, ELAN and more).

Power Metering & Switching

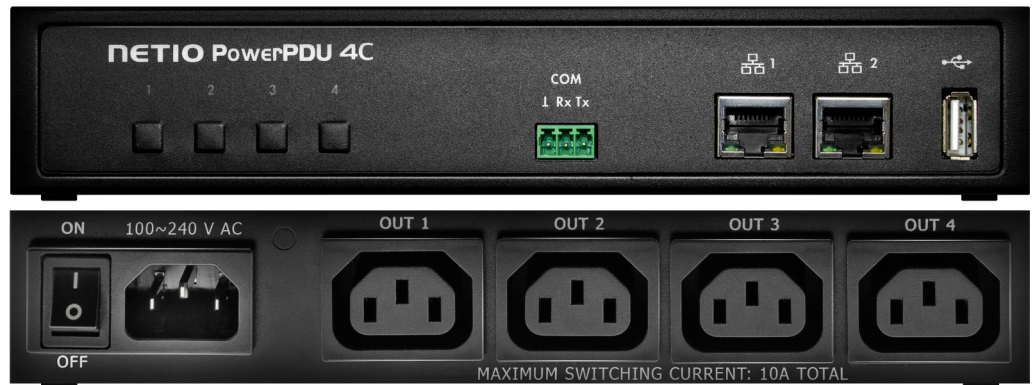

SPECIFICATIONS

- Switching each power output independently
- **4x power metering (A, W, kWh, TPF, V, Hz)**
- Power input: IEC-320 C14 (110/230V AC) 10A
- Power output: 4x IEC-320 C13 / 10A
- **2x RJ-45 Ethernet (built-in LAN switch)**
- **Serial port (RS-232)**
- ZCS (Zero Current Switching)

FEATURES


- **IP Watchdog function**
- Scheduler function
- PowerUp state
- PowerUp delay
- Lua scripting
- AV drivers ready

CONTROL OPTIONS

- Web interface
- Open API
- NETIO Cloud service
- NETIO Mobile2
- Buttons
- Lua script

OPEN API


- Telnet
- SNMP v1/v3
- Modbus/TCP
- MQTT
- URL API – HTTP(s) get
- XML over **HTTP(s)**
- JSON over **HTTP(s)**

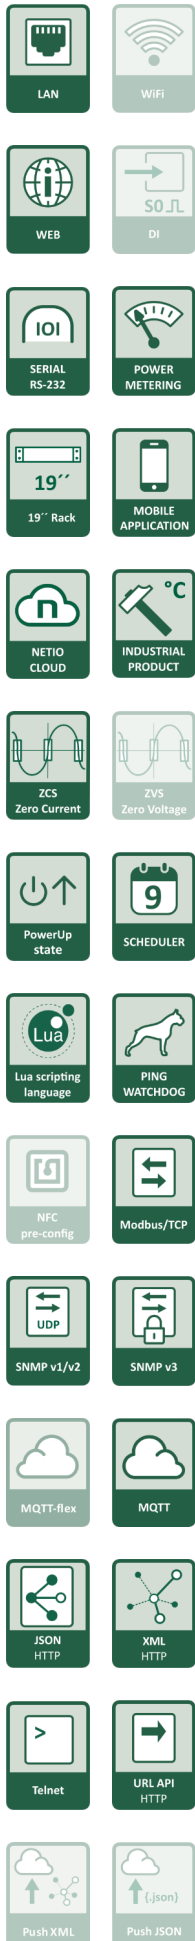

PowerPDU 4PS

PowerPDU 4PS is a managed PDU (Power Distribution Unit) with four power outlets (4x IEC 320 C13). Each output can be switched on/off individually. NETIO PowerPDU 4PS can be mounted in rack cabinets – horizontally, vertically, or as a 1U device. Integration into third-party systems is possible by using various protocols (JSON over HTTP, Modbus/TCP, SNMP, MQTT-flex, Telnet, ...). With the NETIO Cloud service, the outputs can be controlled from anywhere. Drivers for AV systems are available (Crestron, Neets, ELAN and many more).

Power Switching

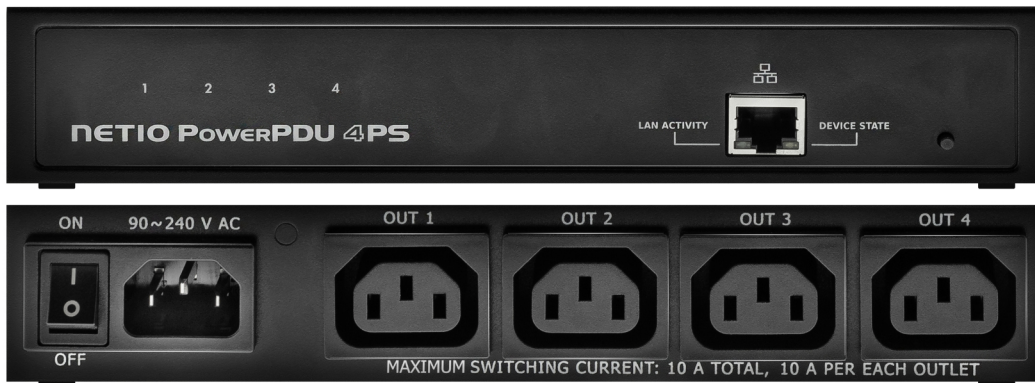

SPECIFICATIONS

- Switching each power output independently
- Power input: IEC-320 C14 (110/230V AC) 10A
- Power output: 4x IEC-320 C13/10A
- 1x RJ-45 Ethernet
- ZVS (Zero Voltage Switching)

FEATURES

- Scheduler function
- PowerUp state
- PowerUp delay
- AV drivers ready

CONTROL OPTIONS

- Web interface
- Open API
- NETIO Cloud service
- NETIO Mobile2

OPEN API

- Telnet
- SNMP v1/v2
- SNMP v3
- MQTT-flex
- URL API – HTTP get
- XML over HTTP
- JSON over HTTP
- HTTP(s) Push JSON
- HTTP(s) Push XML
- Modbus/TCP



PowerPDU 8QS

PowerPDU 8QS is a PDU (Power Distribution Unit) with eight power outputs controlled and metered over LAN. Each output can be switched on/off individually. It fits into a 19" cabinet (1U). PowerPDU 8QS supports two channels for electrical measurements: the PDU as a whole (all outputs combined), and the first output separately (Output1). A digital input (DI) can be used to control the outputs or count 50 pulses. With the NETIO Cloud service, the outputs can be controlled from anywhere. Drivers for AV systems are available (Crestron, Extron, Savant, RTI, Neets, ELAN and more).

Power Metering & Switching



SPECIFICATIONS

- Switching each power output independently
- 2x Power metering (Total + Output1 separately)
- Power input: IEC-320 C20 (110/230V AC) 16A
- Power output: 8x IEC-320 C13 / 10A
- 1x RJ-45 Ethernet
- ZVS (Zero Voltage Switching)
- 1x DI (Digital Input)
- 19" rack mounting as a 1U device

FEATURES

- Scheduler function
- PowerUp state
- PowerUp delay
- AV drivers ready

CONTROL OPTIONS

- Web interface
- Open API
- NETIO Cloud service
- NETIO Mobile2
- DI (Digital Input)

OPEN API

- Telnet
- SNMP v1/v2
- SNMP v3
- MQTT-flex
- URL API – HTTP get
- XML over HTTP
- JSON over HTTP
- HTTP(s) Push JSON
- HTTP(s) Push XML
- Modbus/TCP



PowerDIN 4PZ

PowerDIN 4PZ is a dual 230V/16A electricity meter with LAN/WiFi and I/O, designed to fit on a DIN rail. Each of the 4 outputs can be switched on or off independently using the Web interface, Open API or NETIO Cloud. Power Outputs 1 & 2 are metered (A, W, kWh, TPF, V, Hz). Energy (Wh) is metered in both directions (consumed / supplied energy). States of 2x DI (Digital Input) with S0 pulse counter (32 bit) can be also read remotely.

Power Metering & Switching



SPECIFICATIONS

- 1 phase (power input 230V / max 16A)
- Switching each power output independently
- 2x Power metering (Output 1 & 2)
- 1x RJ-45 Ethernet
- ZCS (Zero Current Switching) on Power Output 1 & 2
- Power Outputs 1 & 2 – independently-metered and switched channels (230V/max 16A AC)
- Relay Outputs 3 & 4 – relay outputs NO/NC (max 230VAC/2A or 48VDC/2A)
- DI (Digital Inputs) In1 & In2 – can be used to connect any dry contact or S0 pulse meter

CONTROL OPTIONS


- Web interface
- Open API
- NETIO Cloud service
- NETIO Mobile2

OPEN API

- Telnet
- SNMP v1/v2
- SNMP v3
- MQTT-flex
- URL API – HTTP get
- XML over HTTP
- JSON over HTTP
- HTTP(s) Push JSON
- HTTP(s) Push XML
- Modbus/TCP

FEATURES


- Scheduler function
- PowerUp state
- PowerUp delay
- AV drivers ready

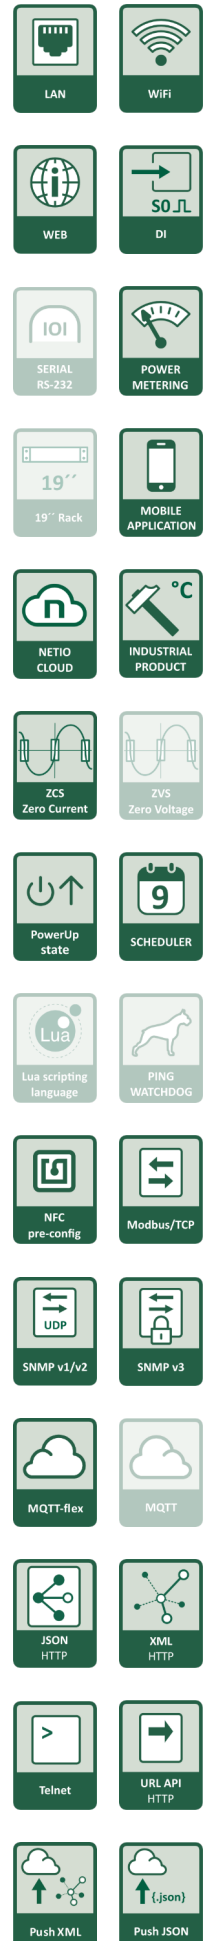

PowerBOX 3Px

NETIO PowerBOX 3Px is a professional electrical socket device with 3 outputs and LAN connectivity. Each output socket can be separately switched on or off over the web interface. Integration into third-party systems using various protocols (JSON over HTTP, Modbus/TCP, SNMP, MQTT-flex, Telnet, ...). With the NETIO Cloud service, the outputs can be controlled from anywhere. Drivers for AV systems are available (Crestron, Extron, Savant, RTI, Neets, ELAN and many more).

Power Switching

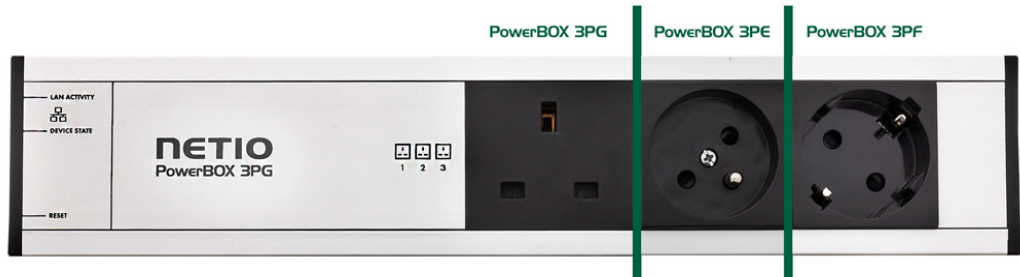

SPECIFICATIONS

- Switching each power output independently
- Power Input: 230V / 16A (13A for 3PG)
- Power Output: **3x**; max 16A per output (13A for 3PG)
- 1x RJ-45 Ethernet
- ZVS (Zero Voltage Switching)

FEATURES


- Scheduler function
- PowerUp state
- PowerUp delay
- AV drivers ready

CONTROL OPTIONS

- Web interface
- Open API
- NETIO Cloud service
- NETIO Mobile2

OPEN API


- Telnet
- SNMP v1/v2
- SNMP v3
- MQTT-flex
- URL API – HTTP get
- XML over HTTP
- JSON over HTTP
- HTTP(s) Push JSON
- HTTP(s) Push XML
- Modbus/TCP

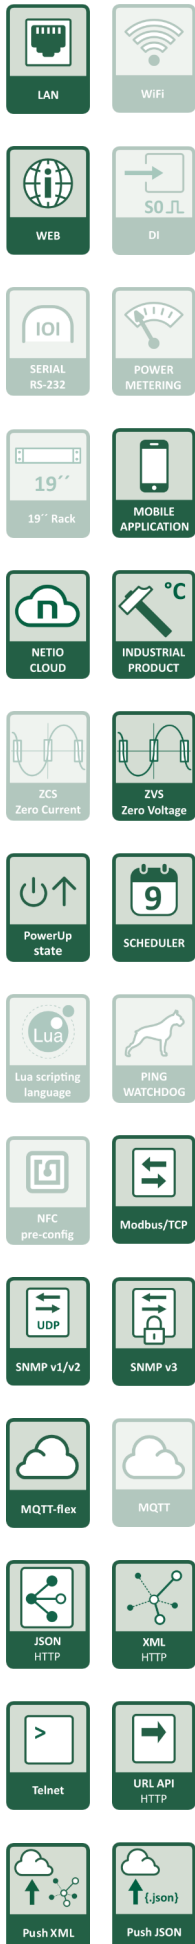

PowerBOX 4Kx

NETIO PowerBOX 4Kx is a LAN-enabled smart power strip with 4 outputs. Each output socket can be switched on or off individually over the web interface. Integration with third-party systems using various protocols (JSON over HTTP, Modbus/TCP, SNMP, MQTT-flex, Telnet, ...) is possible. With the secure NETIO Cloud service, the outputs can be controlled from anywhere. Drivers for AV systems are available (Crestron, Extron, Savant, RTI, Neets, ELAN and more).

Power Metering & Switching

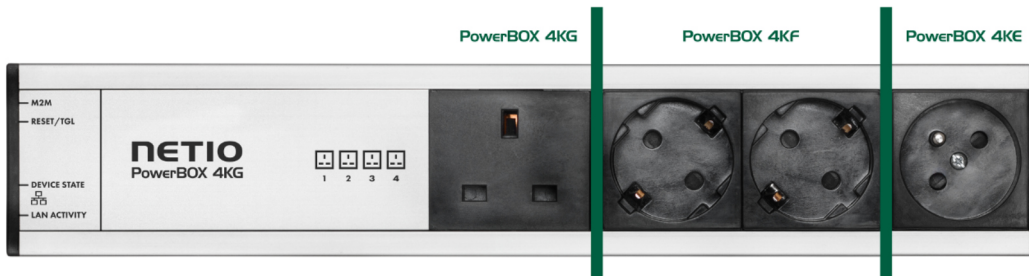

SPECIFICATIONS

- Switching each power output independently
- 4x Power metering (A, W, kWh, TPF, V, Hz)
- Power input: 230V / 16A (13A for 4KG)
- Power output: **4x**; max 16A per output (13A for 4KG)
- 1x RJ-45 Ethernet
- ZCS (Zero Current Switching)

FEATURES


- Scheduler function
- PowerUp state
- PowerUp delay
- AV drivers ready









CONTROL OPTIONS

- Web interface
- Open API
- NETIO Cloud service
- NETIO Mobile2

OPEN API

- Telnet
- SNMP v1/v2
- SNMP v3
- MQTT-flex
- URL API – HTTP get
- XML over HTTP
- JSON over HTTP
- HTTP(s) Push JSON
- HTTP(s) Push XML
- Modbus/TCP

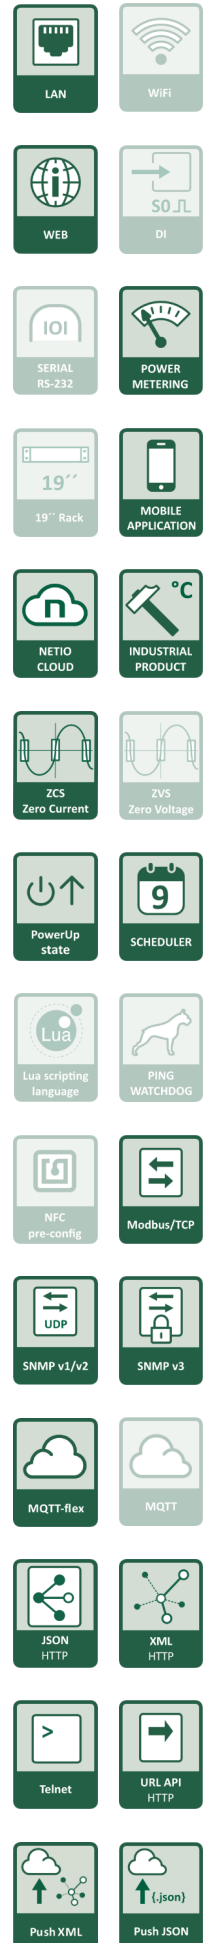



PowerCable REST 101x

NETIO PowerCable REST 101x is a smart WiFi power socket for integration with third-party systems. Use PowerCable REST to measure electrical parameters (A, W, kWh, TPF, V, Hz) and switch its output on/off using one of the 10 Open API protocols, the web interface, NETIO Cloud, or the mobile app. Drivers for AV systems are available (Crestron, Extron, Savant, RTI, Neets, ELAN and more).

Power Metering & Switching



SPECIFICATIONS

- Power output switching
- Power metering (A, W, kWh, TPF, V, Hz)
- Power input: Depending on the model
- Power output: 110/230V 10-16A (by model 101x)
- WiFi connection
- ZCS (Zero Current Switching)

FEATURES

- Scheduler function
- PowerUp state
- PowerUp delay
- AV drivers ready

CONTROL OPTIONS

- Web interface
- Open API
- NETIO Cloud service
- NETIO Mobile2

OPEN API

- Telnet
- SNMP v1/v2
- SNMP v3
- MQTT-flex
- URL API – HTTP get
- XML over HTTP
- JSON over HTTP
- HTTP(s) Push JSON
- HTTP(s) Push XML
- Modbus/TCP

Available models



PowerCable REST 101F



PowerCable REST 101E



PowerCable REST 101J



PowerCable REST 101S



PowerCable REST 101Y



PowerCable REST 101G

PowerCable IQRF 901x

NETIO PowerCable IQRF 901x is a smart power extension cable that communicates over the IQRF LPWAN network (868 MHz). The 230V/16A electrical socket features accurate electricity metering (A, V, W, TPF, kWh, Hz) and can be switched on and off with full IQRF Interoperable support.

Power Metering & Switching








SPECIFICATIONS

- Power output switching
- Power metering (A, W, kWh, TPF, V, Hz)
- Power input: 230V / 16A (901G - 13A)
- Power output: 230V / 16A (901G - 13A)

FEATURES

- IQRF interoperable
- Smart connect + button bond
- ZCS (Zero Current Switching)




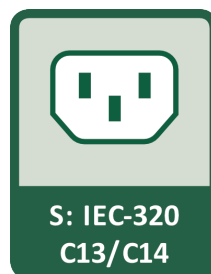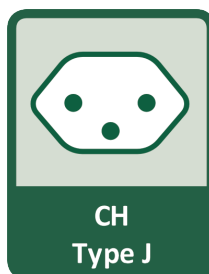

PowerPDU family accessories


NETIO RM1 4C

Metal brackets to install one PowerPDU 4C or PowerPDU 4PS device into a 1U space in a 19" rack frame.

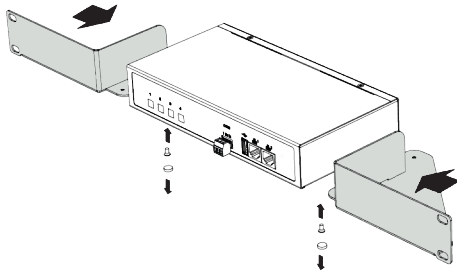


NETIO RM2 2x4C

Metal brackets to install two pieces of Power PDU 4C or PowerPDU 4PS devices into a 1U space in a 19" rack frame.

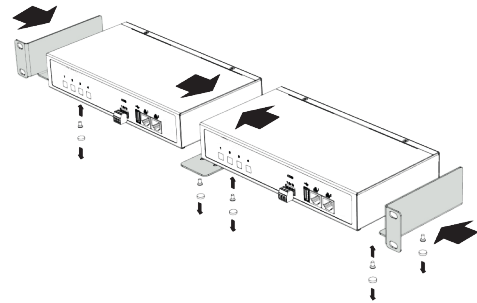


NETIO RM3 4C vertical

Metal brackets to fasten one NETIO PowerPDU device (PowerPDU 4C or 4PS) to a vertical bar in a rack frame.

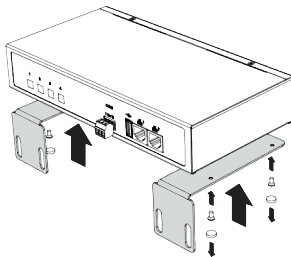

NETIO RM4 4C universal

Universal metal brackets to fasten one PowerPDU 4C or PowerPDU 4PS device e.g. to horizontal bars in a rack frame.

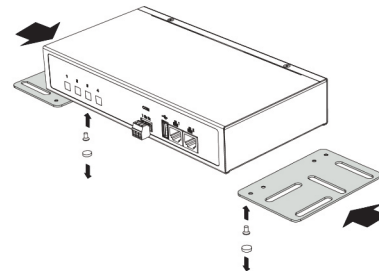

PowerBOX family accessories

NETIO MK1 PowerBOX

Metal bracket for mounting 1 piece of PowerBOX 3Px or PowerBOX 4Kx on the wall, contains two metal pieces. Both parts slide into the aluminum profile (back side).



NETIO Cloud



NETIO Cloud is an ideal solution for remote control and restarting. With NETIO Cloud, all power outputs of multiple NETIO devices can be switched on/off or power-cycled over a single screen (web) independently. Unlimited number of NETIO devices connected to the Cloud. For metered outputs, the service displays the up-to-date overall consumption reading.

- **One web page** to control dozens and hundreds of electrical power outputs (On / Off / Power-cycle).
- **End to end SSL (TLS) secured** communication is used between devices, servers, apps and your web browser.
- Name and group assignment for each output and device.
- **Outputs can be arranged into groups** (buildings, location, customer, ...).
- For metered outputs, up-to-date overall consumption readings (kWh) are shown.
- With each NETIO device, **“Welcome credit”** is given free of charge. The welcome credit is loaded automatically when the device is first connected to the NETIO Cloud.
- NETIO Cloud supports Open API (MQTTs), it can be used as the single point for integration of multiple devices.



NETIO Mobile2

NETIO Mobile2 is a mobile application, which allows you to control multiple NETIO smart PDUs, strips, sockets and cables over the local network (LAN / WiFi) from mobile phones and tablets. It is supported by all NETIO devices.




- **Control individual power outputs** – switch ON, switch OFF, RESET
- **Read power consumption data** (A, W, Wh) from outputs that support energy metering
- Turn the Scheduler on / off for each output
- Outputs can be arranged into groups
- Group control - switch on/off all outputs in the group
- Group control - turn the Scheduler on/off for all outputs in the group
- Organize the outputs within groups (by function or location)
- Change output / device names (visible in the application)
- Add multiple devices to the mobile app
- Search your network for NETIO devices (LAN discover function)

For NFC enabled NETIO devices and mobile devices:

- Quick WiFi config – use NFC to connect multiple devices quickly to your WiFi
- WiFi config with a Profile (saved WiFi configuration) using NFC
- NFC diagnostics – identify serial number and basic configuration (FW, device name, WiFi network info, ...)



Accurate power metering

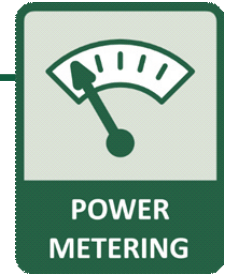

As a unique feature, NETIO power socket models that support power metering can measure electrical parameters with a high accuracy (1%) - each device is two-point calibrated at the factory, giving you a reliable data source for your power analysis!

All metered values are accessible via web interface and Open API.


Metered values*

- Current [A]
- Output power [W]
- Energy [Wh]
- TPF (True Power Factor)
- Voltage [V]
- Grid frequency [Hz]
- Phase shift [°]
- Reverse Energy [Wh]

*Actual number of metered values depends on the product model

How can you use the data?

- Power & Cost analysis of your electrical appliance (TV screens, fridges etc.)
- Long-term behavior monitoring and predictive maintenance
- Threshold warnings when power is too high / too low
- Monitoring fault conditions (e.g. water pump is running dry)
- Power monitoring over SNMP in Zabbix / Nagios / Prometheus / Grafana etc.
- Counting repeated work cycles of a generic mechanical machine (e.g. gates, robots or vending machines)

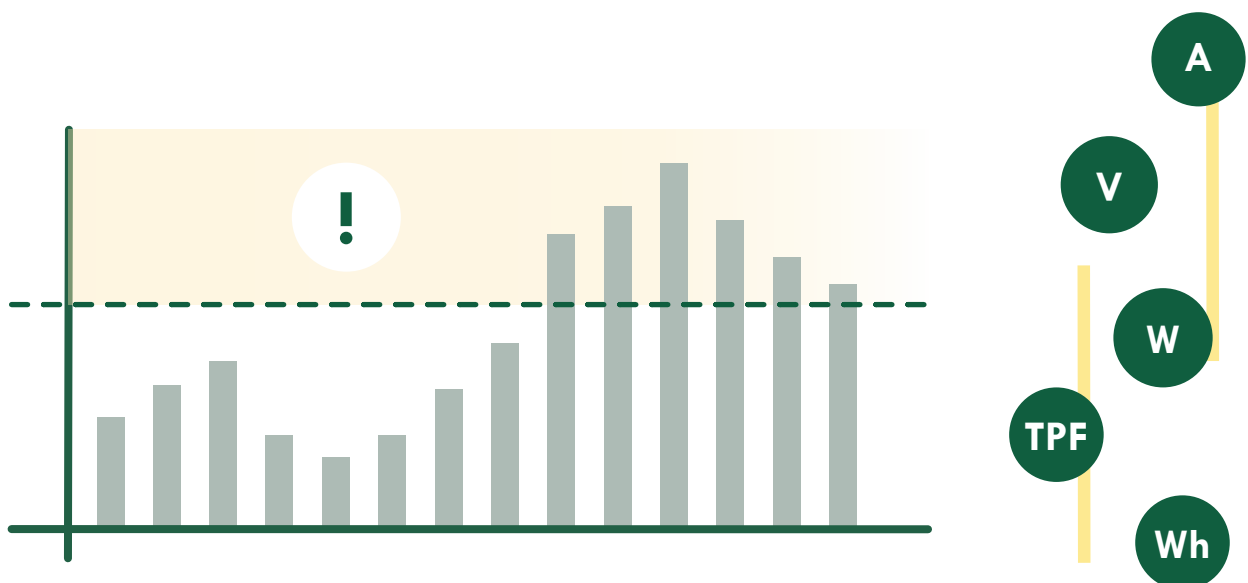


User-friendly web interface



NETIO devices include their own web server and can be configured over the web interface. The web interface is accessible over the local network with any web browser at the device's IP address. Each output can be controlled independently and electrical metering data are visible for metered outputs.

- **Switching** each power output On / Off / Reset
- Electrical **metering** data visible
- **Open API** configuration
- **NETIO Cloud** connection
- **Scheduler function:** Time-based power switching for each output
- **IP Watchdog** and **Lua scripting** (for PowerPDU 4C only)
- **PowerUp state:** Define the behavior of the power output after the device is powered up (or after power is restored after power outage). Possible values: On / Off / Last state.
- **PowerUp delay:** Set a delay (in milliseconds) to wait before switching the output (e.g. when the power is restored after an outage). This prevents circuit breakers from tripping.

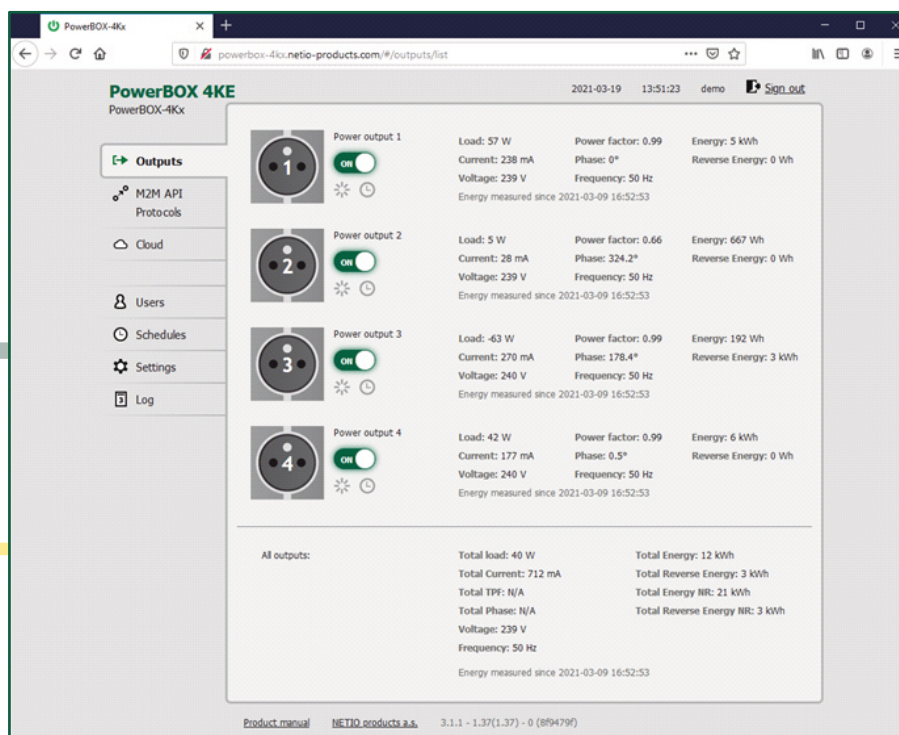

Open API

Monitor and control your NETIO power socket via any interoperable device, software or cloud. NETIO devices can be easily integrated into the systems you are already using. NETIO products support many Open API standards such as MQTT, Modbus/TCP, JSON over HTTP, SNMP, XML and more...



JSON and XML over HTTP(s)

JSON and XML are popular thanks to their simplicity and human-readability. JSON is the most popular protocol, used in most integrations in the AV market – Crestron, Control4, RTI, Savant and more.



URL API (http get)

By accessing a certain WWW address, a socket can be switched on, switched off, or toggled. This method is often used in IP surveillance cameras, JAVA scripts, or other web technologies.



HTTP(s) Push – JSON / XML

NETIO devices can periodically connect to the specified server over http / https and send data in a JSON or XML structure. It is useful in cases where the NETIO device is not accessible from the internet or the server (NETIO device is in a LAN behind a NAT).



MQTT / MQTT-flex

MQTT is often used in IoT applications and related cloud services. It is designed for large networks with low data traffic to minimize data volumes. MQTT-flex is a text based configurable version of the standard MQTT protocol (broker details, topics, payloads, etc.).



SNMP v1/v2, SNMP v3

NETIO sockets can be controlled via SNMP v1/v2 or the more secure SNMP v3. Popular SNMP applications are: Nagios, Zabbix, Cacti, Paessler PRTG Network Monitor and more.



Modbus/TCP

Modbus/TCP is very common in industry, where it is a de-facto standard for communication on a local level. It does not support any security. Thanks to Modbus/TCP support, NETIO sockets can be controlled from PLCs or various SCADA applications.









Telnet

NETIO sockets can be controlled with commands sent over a Telnet connection. We maintain Telnet command compatibility with the KShell (Koukaam Shell) instruction set to ensure backward compatibility with Koukaam products.

**Available APIs depend on the actual product model*

Application Notes

A huge library of Application Notes helps with a better understanding of using NETIO products in your applications. Visit www.netio-products.com – to learn about “How to API”, browse examples of integrations, setups and more...

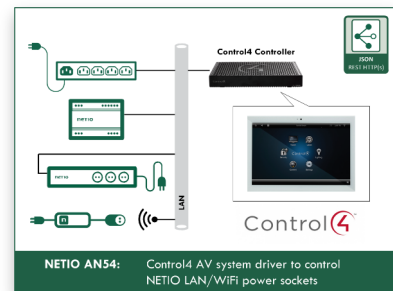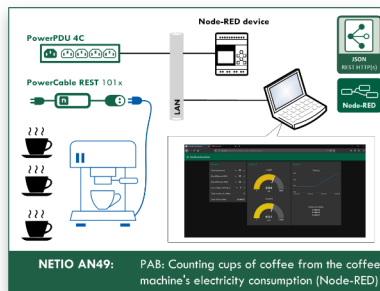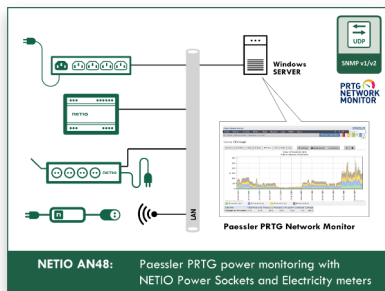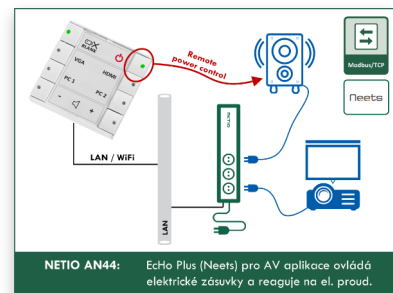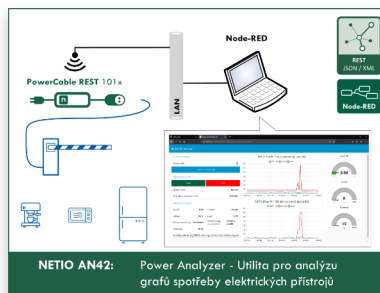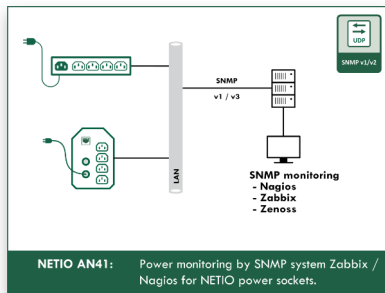

Integration partners

We believe in interoperability and easy integration using Open API. Each NETIO device supports multiple APIs, which makes it a versatile component to your system.

SAVANT

ELAN

Control4

ZABBIX

RTI

LOXONE

Hs

BrightSign

TRIDIUM

Neets

PAESSLER®
the network monitoring company

OII7SENSE

Domoticz
control at your fingertips.

Node-RED

KRAMER

KRAMER

domotz

SKAARHOJ

Nagios®

CRESTRON

AVS
Alarm Visualization System

Product comparison

	PowerPDU 4C	PowerPDU 4PS	PowerPDU 8QS	PowerBOX 3PF	PowerBOX 3PE	PowerBOX 3PG	PowerBOX 4KF	PowerBOX 4KE	PowerBOX 4KG
Power input type	C14	C14	C20	Europlug	Europlug	Type G	Europlug	Europlug	Type G
Power input voltage	100 - 240 V	100 - 240 V	100 - 240 V	100 - 240 V	100 - 240 V	100 - 240 V	100 - 240 V	100 - 240 V	100 - 240 V
Power input current	max 10A	max 10A	max 16A	max 16A	max 16A	max 13A	max 16A	max 16A	max 13A
Power output type	4x C13	4x C13	8x C13	3x Type F	3x Type E	3x Type G	4x Type F	4x Type E	4x Type G
Surge protection (SPD Type 3)	●	●	●	●	●	●	●	●	●
Internal consumption	2 - 5 W	1 - 2 W	1 - 3 W	1 - 2 W	1 - 2 W	1 - 2 W	1 - 2 W	1 - 2 W	1 - 2 W
RS-232 (serial port)	●	-	-	-	-	-	-	-	-
Switched channels	4	4	8	3	3	3	4	4	4
Metered channels	4	-	1+ Total	-	-	-	4	4	4
Relay outputs (NO/NC)	-	-	-	-	-	-	-	-	-
Digital Inputs (DI) + SO counter	-	-	1	-	-	-	-	-	-
LAN	●	●	●	●	●	●	●	●	●
LAN switch	2 ports	-	-	-	-	-	-	-	-
WiFi	-	-	-	-	-	-	-	-	-
Web interface	●	●	●	●	●	●	●	●	●
Open API	●	●	●	●	●	●	●	●	●
PowerUp state	●	●	●	●	●	●	●	●	●
PowerUp delay	●	●	●	●	●	●	●	●	●
Scheduler function	●	●	●	●	●	●	●	●	●
Watchdog function	●	-	-	-	-	-	-	-	-
ZCS / ZVS	ZCS	ZVS	ZVS	ZVS	ZVS	ZVS	ZCS	ZCS	ZCS
Lua scripting	●	-	-	-	-	-	-	-	-
NETIO Cloud support	●	●	●	●	●	●	●	●	●
Mobile App	●	●	●	●	●	●	●	●	●
SNMP v1/v2	●	●	●	●	●	●	●	●	●
SNMP v3	●	●	●	●	●	●	●	●	●
Modbus/TCP	●	●	●	●	●	●	●	●	●
MQTT-flex	-	●	●	●	●	●	●	●	●
MQTT	●	-	-	-	-	-	-	-	-
JSON over HTTP	●	●	●	●	●	●	●	●	●
XML over HTTP	●	●	●	●	●	●	●	●	●
Telnet	●	●	●	●	●	●	●	●	●
URL API (http get)	●	●	●	●	●	●	●	●	●
HTTP(s) Push - JSON	-	●	●	●	●	●	●	●	●
HTTP(s) Push - XML	-	●	●	●	●	●	●	●	●
HTTPs	●	-	-	-	-	-	-	-	-
19" rack mount	○	○	●	-	-	-	-	-	-

Product comparison

[illegible]

NETIO

Networked power sockets

NETIO products a.s.

**U Pily 103/3
143 00 Praha 4 - Modrany
Czech Republic**

 **www.netio-products.com**

 **info@netio.eu**

 **+420 211 150 111**

 **AVIXA** Member

NETIO products distributor
